


# 1x16 HDMI Splitter, Support 3D,4Kx2K

## Operating Instructions

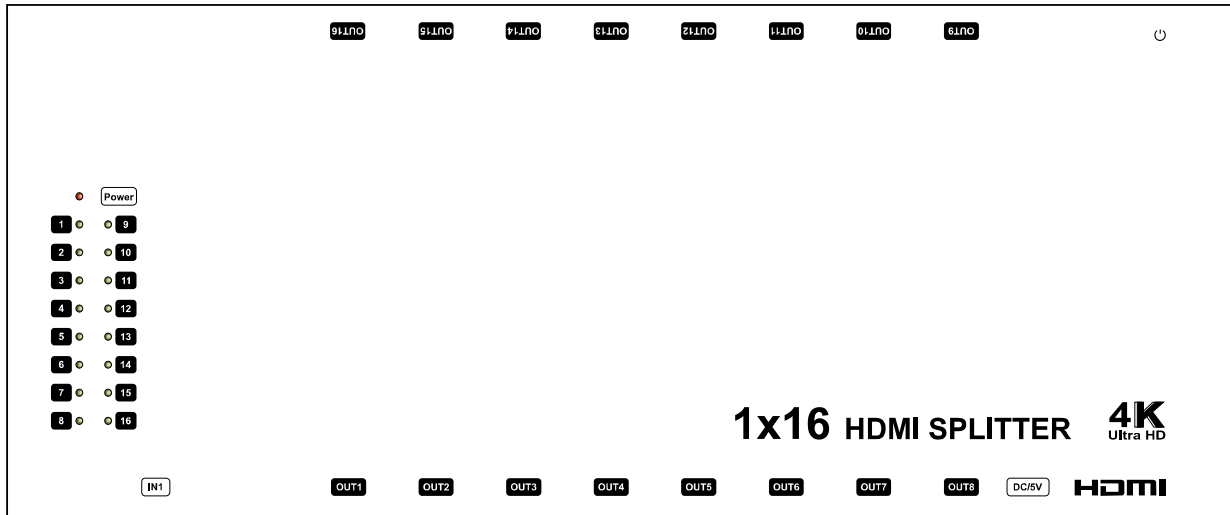

## Dear Customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## FEATURES

- Distributes 1 HDMI source to 16 HDMI Displays simultaneously.
- Supports all the mandatory and several optional 3D formats
- Supports resolutions up to Ultra HD 4K x 2K (3840 x 2160 @ 30Hz) and 1080p Full HD
- Supports High Definition Resolutions: 1080p @ 60HZ, 720p/1080i @ 120Hz.
- Supports Digital Audio Format, such as High Definition Audio support: Dolby TrueHD, and DTS-HD Master Audio.
- DC 5V Power.

## NOTICE

Our company reserve the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

## TABLE OF CONTENTS

Introduction

Specifications

Package Contents

Panel Descriptions

Connecting and Operating

Typical Application

Product Service

Warranty

## INTRODUCTION

It is newest 1x16 splitter, supports all the mandatory and several optional 3D formats, maintains sharp HDTV resolution up to 4Kx2K full HD. It offers HD video solution for super market, shopping mall; HDTV, STB, DVD and projector factory; data control center; conference rooms; education and training; luxurious house; home theaters etc.

## SPECIFICATIONS


Operating Temperature Range	-5 to +35°C (+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
Input Video Signal	0.5-1.0 Volts P-P
Input DDC Signal	5 volts p-p(TTL)
Data transfer speed rate	9.0Gbps(Maximum)
Video Format Supported	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P/4Kx2K 3D video support
Video Output	HDMI
Support Video Color Format	xv-YCC/deep color 36bit
Support Audio Format	DTS-HD/true-HD/LPCM7.1/AC3/DTS/DSD
Power consumption	15watts(Maximum)
Dimension (L×W×H)	350x147x40mm
Net Weight	1450g

**Note:** Specifications are subject to change without notice. Mass and dimensions are approximate.

## PACKING CONTENTS

- 1) Main Unit. 16-port HDMI splitter
- 2) 5VDC Power Supply.
- 3) Operating Instructions

## PANEL DESCRIPTIONS

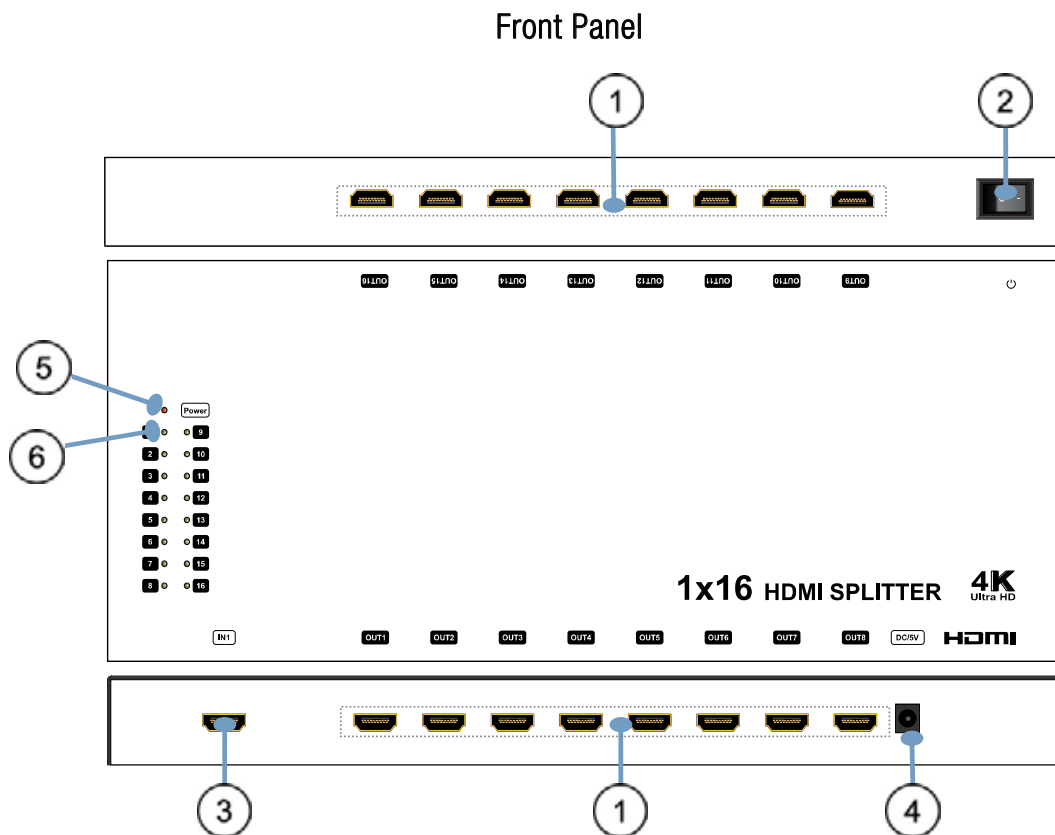

- 1) HDMI outputs.
- 2) Power on/off: press the up/down to open/close the device.
- 3) HDMI Input.
- 4) Power input.
- 5) Indicator of Power Input. When power is ON, the corresponding LED lights.
- 6) Indicator of HDMI outputs. When a HDMI equipment is connected, the corresponding LED lights.

## CONNECT AND OPERATE

- 1) Connect the HDMI signal source (Such as PS3, STB etc) into HDMI input.
- 2) Connect the HDMI display devices (such as: HD-LCD, HD-DLP) into HDMI outputs.
- 3) Insert the DC side of 5v power supply into Power input and then connect the AC side of the power supply into the wall outlet.

**Attention: Insert/Extract cable gently.**

## MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.

## PRODUCT SERVICE

- 1) **Damage requiring service:** The unit should be serviced by qualified service personnel if:

- (a)The DC power supply cord or AC adaptor has been damaged;
  - (b)Objects or liquids have gotten into the unit;
  - (c)The unit has been exposed to rain;
  - (d)The unit does not operate normally or exhibits a marked change in performance;
  - (e)The unit has been dropped or the cabinet damaged.
- 2) **Servicing Personnel:** Do not attempt to service the unit beyond that described in these operating instructions. Refer all other servicing to authorized servicing personnel.
- 3) **Replacement parts:** When parts need replacing ensure the servicer uses parts specified by the manufacturer or parts that have the same characteristics as the original parts. Unauthorized substitutes may result in fire, electric shock, or other hazards.
- 4) **Safety check:** After repairs or service, ask the servicer to perform safety checks to confirm that the unit is in proper working condition.