


HDCP2.2 to HDCP1.4 Converter

Operating Instructions

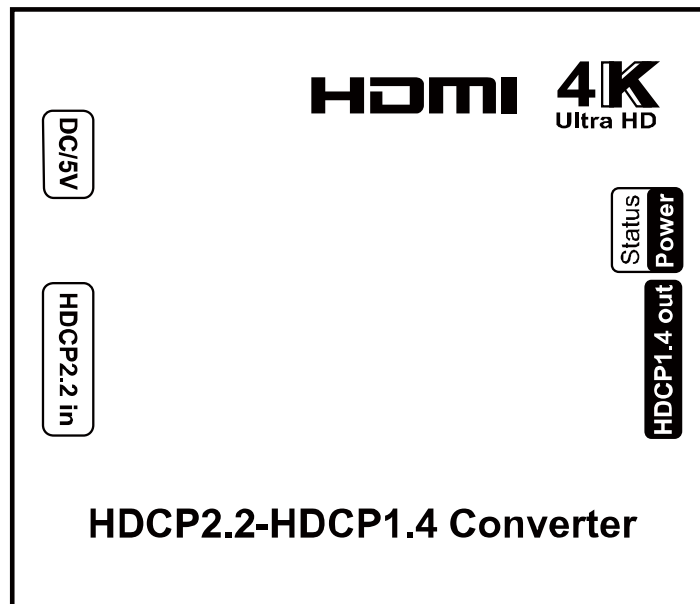

Dear Customer

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

INTRODUCTION

This is a Newest converter to convert HDCP2.2 to HDCP1.4, You can connect the converter with HDCP1.4 devices to make sure the HDCP2.2 source can be displayed on the HDCP1.4 displays.

FEATURES

- HDMI IN, HDMI OUT, compliant HDMI 1.4B.
- Converter HDCP 2.2 to HDCP1.4.
- Support 4Kx2K@60HZ, YUV 4:2:0.
- Support audio format Dolby, DTS, LPCM.
- Support 3D, CEC.
- Support 5V 1A.

TABLE OF CONTENTS

Specifications
 Package Contents
 Panel Descriptions
 Connecting and Operating
 Maintenance
 Product Service
 Warranty

SPECIFICATIONS

Operating Temperature Range	-5 to +35°C (+23 to +95°F)
Operating Humidity Range	5 to 90%RH (No Condensation)
HDMI input	HDCP2.2
HDMI output	HDCP1.4
Video Format Supported	DTV/HDTV:480i/576i/480P/576P/720P/1080i/1080P/4Kx2K 3D video support
Maximum video Format	4Kx2K@60Hz, YUV 4:2:0
HDMI input	1xHDMI (Standard Type A connector)
HDMI output	1xHDMI (Standard Type A connector)
Support Video Color Format	xv-YCC/deep color 36bit
Support Audio Format	DTS-HD Master Audio, Dolby true-HD. LPCM
Power consumption	1.5 watts(Maximum)
Dimension (L×W×H)	70.2*60.2*21.1mm
Net Weight	120g(pcs)


NOTICE

Our company reserve the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

PACKING CONTENTS

- 1) Main Unit: HDCP Converter
- 2) DC 5V 1A x1PCS
- 3) Operating Instructions

PANEL DESCRIPTIONS

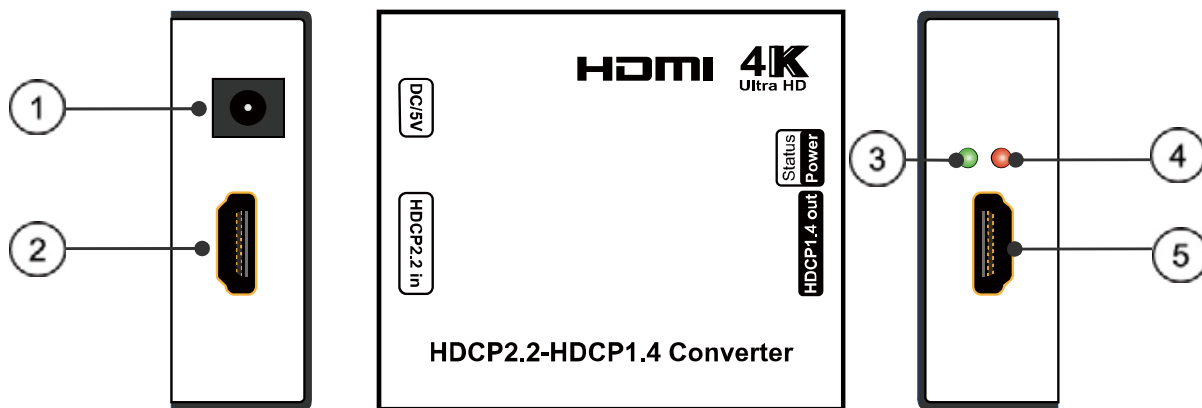


- 1. Power input
- 2. HDCP2.2 input
- 3. Signal status indicator
- 4. Power status indicator
- 5. HDCP 1.4 out

CONNECTING AND OPERATING


- 1) Connect 4K HDMI source with HDCP converter.
- 2) Connect HDCP converter to other HDCP1.4 devices.
- 3) Connect power adapter into HDCP converter.

Connection Diagram

Application 1

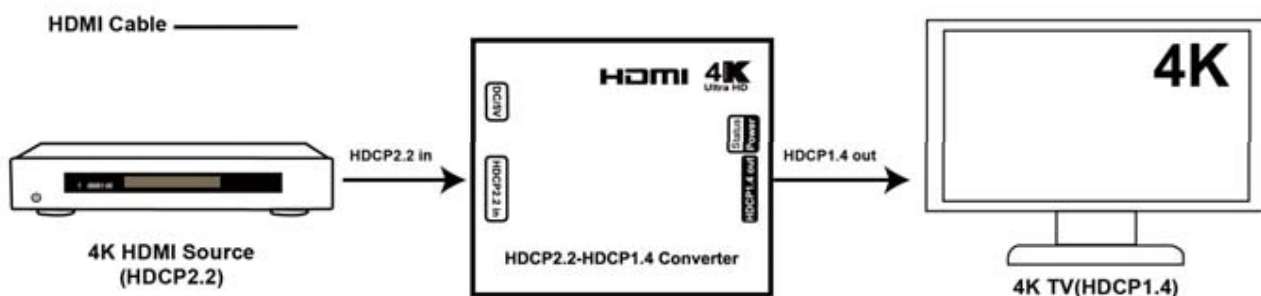

Application 2

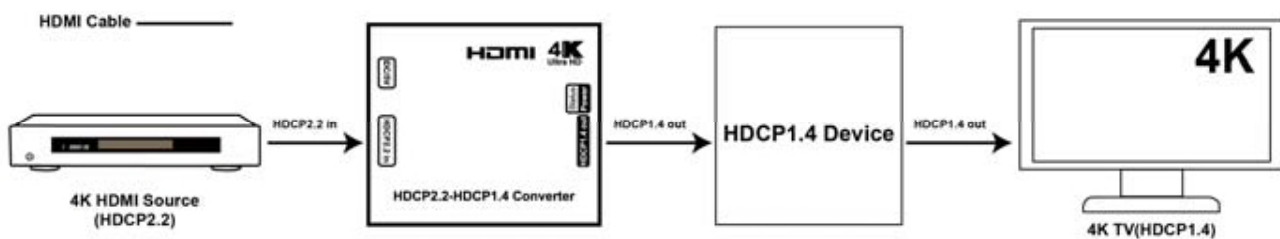

MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.