Feature:

- ✓ Commercial PA system wall mount speaker with transformer
- ✓ Ideal for school, office, hotel and airport background music system
- ✓ Compliant with the EN54-24 standards
- ✓ The impact-resistant & UV-resistant ABS plastic housing.
- ✓ IP44 protection level against the risks of environmental influences
- ✓ An integrated thermal fuse, 95°C fire-resistant cable and fire-resistant cone are designed especially for EN54 standards
- ✓ Rated power output 5W-10W-20W+ 8 Ohm
- ✓ 4" woofer and 1.5" tweeter two way speaker units
- ✓ Line input 100V or 70V & low impedance 8Ω power selector
- ✓ Quick installation by supplied stainless mounting bracket
- ✓ ET-420Das option of white finish


Specification:


Model	ET-420D
Description	4" Two Way Wall Mount Speaker
Rated Power Output	5W-10W-20W
Line Input	100V or 70V
Frequency Response	100-20KHz
SPL(@1W/m)	89dB
Speaker Unit	4" woofer and 1.5" tweeter two way speaker units
Dimension	270×170×155mm
Material	ABS enclosure and metal grille in black or White
Mounting Way	Quick installation by supplied stainless mounting bracket
Weight	2.3kg

Side View & Dimensions:











Frequency Response VS SPL Diagram:



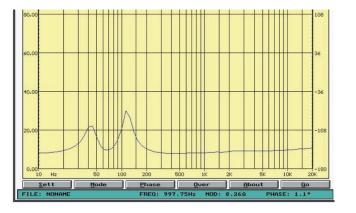



EN54-24